

Streaming Telemetry in zero-footprint monitoring studies in WP6T3

Pavle Vuletic, UoB/AMRES
Marinos Dimolianis, NTUA

Telemetry and Big Data Workshop,
10th November 2020

Public

www.geant.org

Zero-footprint monitoring goals


- (active) performance monitoring usually means adding additional devices (probes) into the PoPs - increased PoP complexity
- Performance - SLA parameter monitoring: delay, jitter, loss
- Can we monitor network service performance using standard based protocols and without the use of any additional equipment in PoPs? (zero footprint)
- Previous issues:
 - Proprietary protocols (Juniper RPM, Cisco SLA)
 - No standard protocol implementation
 - Monitoring probes became small, but even very small or virtual probe mean additional hardware in PoPs
- Other goals: Monitoring path end to end and per-segment, monitoring separate network services

Landscape has changed recently

- TWAMP implementation on Juniper and Cisco devices (Cisco - responder only)
- Virtual services on Cisco - can install Linux on spare CPU cycles and on that Linux e.g. perfSONAR,
- Cisco guestshell - run custom Linux applications, for automated control and management
- Are all these implementations interoperable?
- Can these TWAMP implementations be used for detailed network performance monitoring? (end-to-end and per segment)
- Export the data using streaming telemetry

Two-Way Active Measurement Protocol (TWAMP)

- Host to Host (twping – perfsonar/owamp)
- Host to Router (twping – TWAMP server)
- Router to Router (TWAMP server – client)
- Host to virtual service on a router (twping - twping)
- Virtual service on a router to router or host

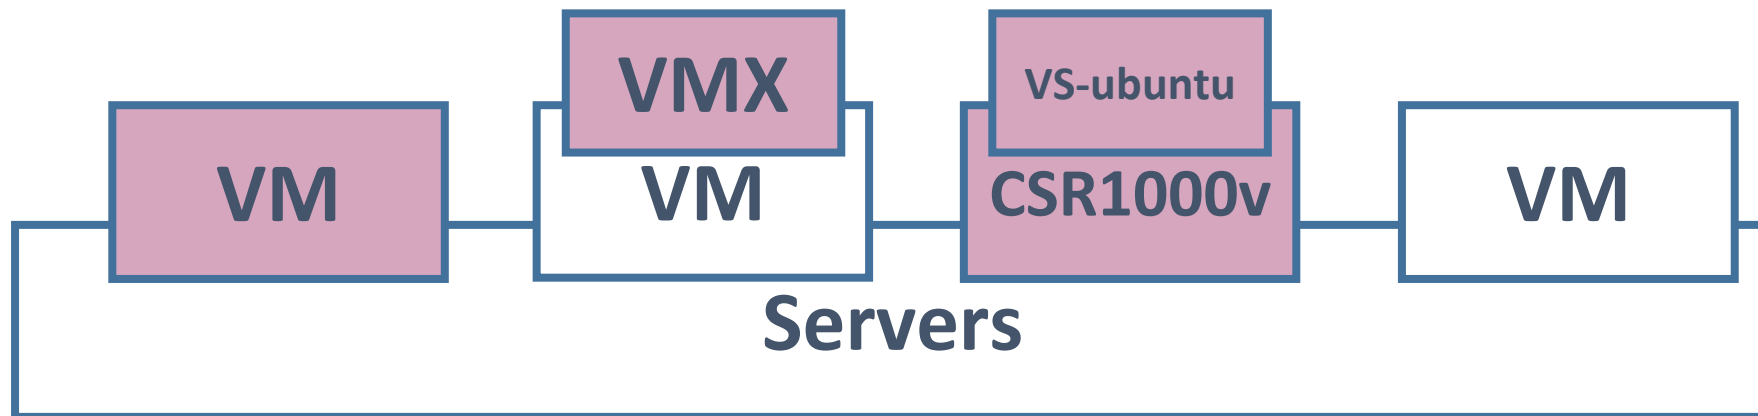

Although interoperable, the metric set is not the same

- **Juniper Routers (SNMP)**


- Round Trip Time (RTT)
- RTT Jitter
- RTT Inter-arrival Jitter
- Egress Jitter
- Egress Inter-arrival Jitter
- Ingress
- Ingress Jitter
- Ingress Inter-arrival Jitter



Min, Max, Average, StdDev

- **Linux Hosts**

- Round Trip Time (RTT)
- Send Time
- Reflect Time
- Two Way Jitter
- Send Jitter
- Reflect Jitter



Min, Max, Median

Why streaming telemetry?

- Supported on the latest releases of network OSeS, although still different transport methods and data models:
 - J: UDP, gRPC, C: NETCONF, gRPC, gNMI
 - J: Juniper, OpenConfig, C: YANG
- Real time monitoring - you can retrieve data even within ms
- More reliable, secure than SNMP
- Expected to have smaller processing requirements in comparison to SNMP
- Use streaming telemetry to subscribe on data that the vendor supports or in programmable data planes stream your own data.

Streaming Telemetry export

- Dial-Out
 - Data subscription is configured in the router (periodic or on-event)
 - Simplicity
- Dial-In
 - Data subscription is defined in the collector
 - Scalability

Cisco Dial-Out Configuration

```
telemetry ietf subscription 98
  encoding encode-kvgpb
  filter xpath /ip-sla-ios-xe-oper:ip-sla-stats
  source-address 172.16.0.82
  stream yang-push
  update-policy periodic 5000
  receiver ip address 172.16.0.252 57000 protocol
  grpc-tcp
```

Juniper Dial-In Configuration

```
system {
  services {
    ssh;
    telnet;
    extension-service {
      request-response {
        grpc {
          ssl {
            port 32767;
            local-certificate vMX1;}
          }
        }
      }
    }
  }
}
```

Streaming Telemetry Data collection



Telegraf - Configuration

Cisco Dial-Out


```
[[inputs.cisco_telemetry_mdt]]  
transport = "grpc"  
# Address and port to host telemetry listener  
service_address = ":57000"  
[inputs.cisco_telemetry_mdt.aliases]  
ifstats = "ietf-interfaces:interfaces-  
state/interface/statistics"
```

Juniper Dial-In

```
[[inputs.jti_openconfig_telemetry]]  
servers =  
["vMX1:32767","vMX2:32767","vMX3:32767","vMX4:32767"]  
username = "XXX"  
password = "XXX"  
client_id = "telegraf"  
sensors = [  
"/interfaces/",  
"collection /components/ /lldp",  
"twampmeasurements /junos/twamp/client/probe-test-results/" ]
```


Experimental evaluation

- Path through the Linux, Juniper and Cisco devices
- Monitor per-segment and end-to-end service performance
- Added latency, jitter
- Test dynamic path changes

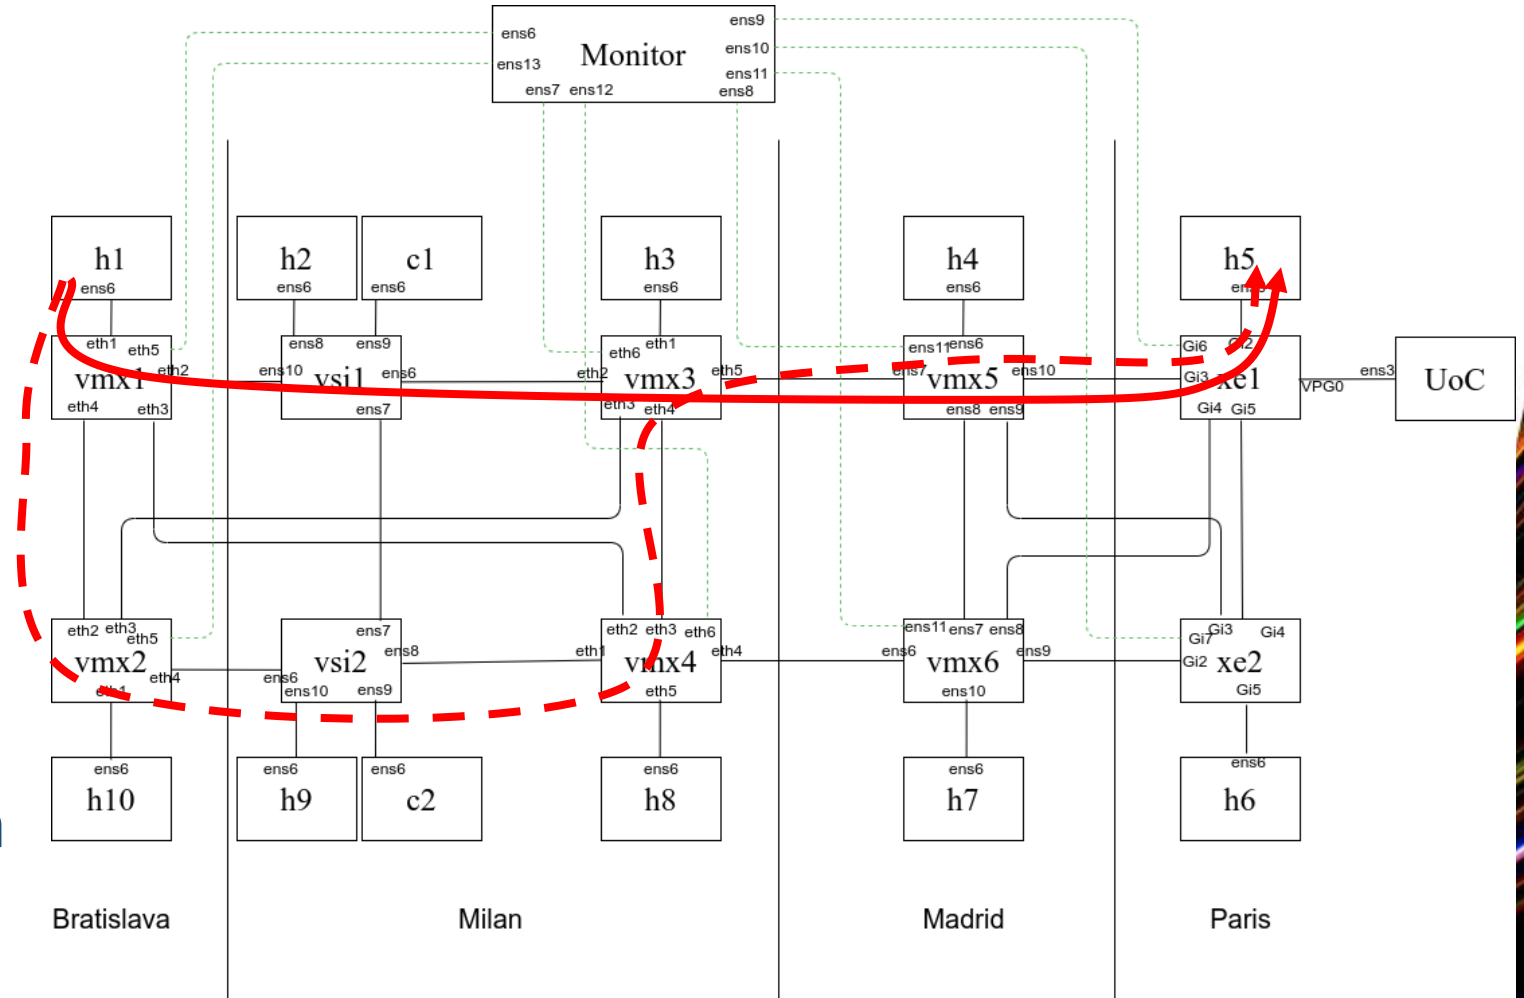

How it looked like

15:00: Additional delays are added using the `tc` tool on selected interfaces of the VS1 and VS2 devices:

- VS1 ens10: 20ms, ens6: 40ms
- VS2 ens6: 40ms, ens10: 60ms


15:10: Traffic is redirected via vMX1-vMX2-VS2-vMX4-vMX3.

15:20: The original path is restored and network traffic is rerouted via the path: vMX1-VS1-vMX3.

15:30: Delays are returned to their original values.

15:40: The Jitter is added to vMX1->vMX3.

15:50: The Jitter is removed from vMX1-vMX3.

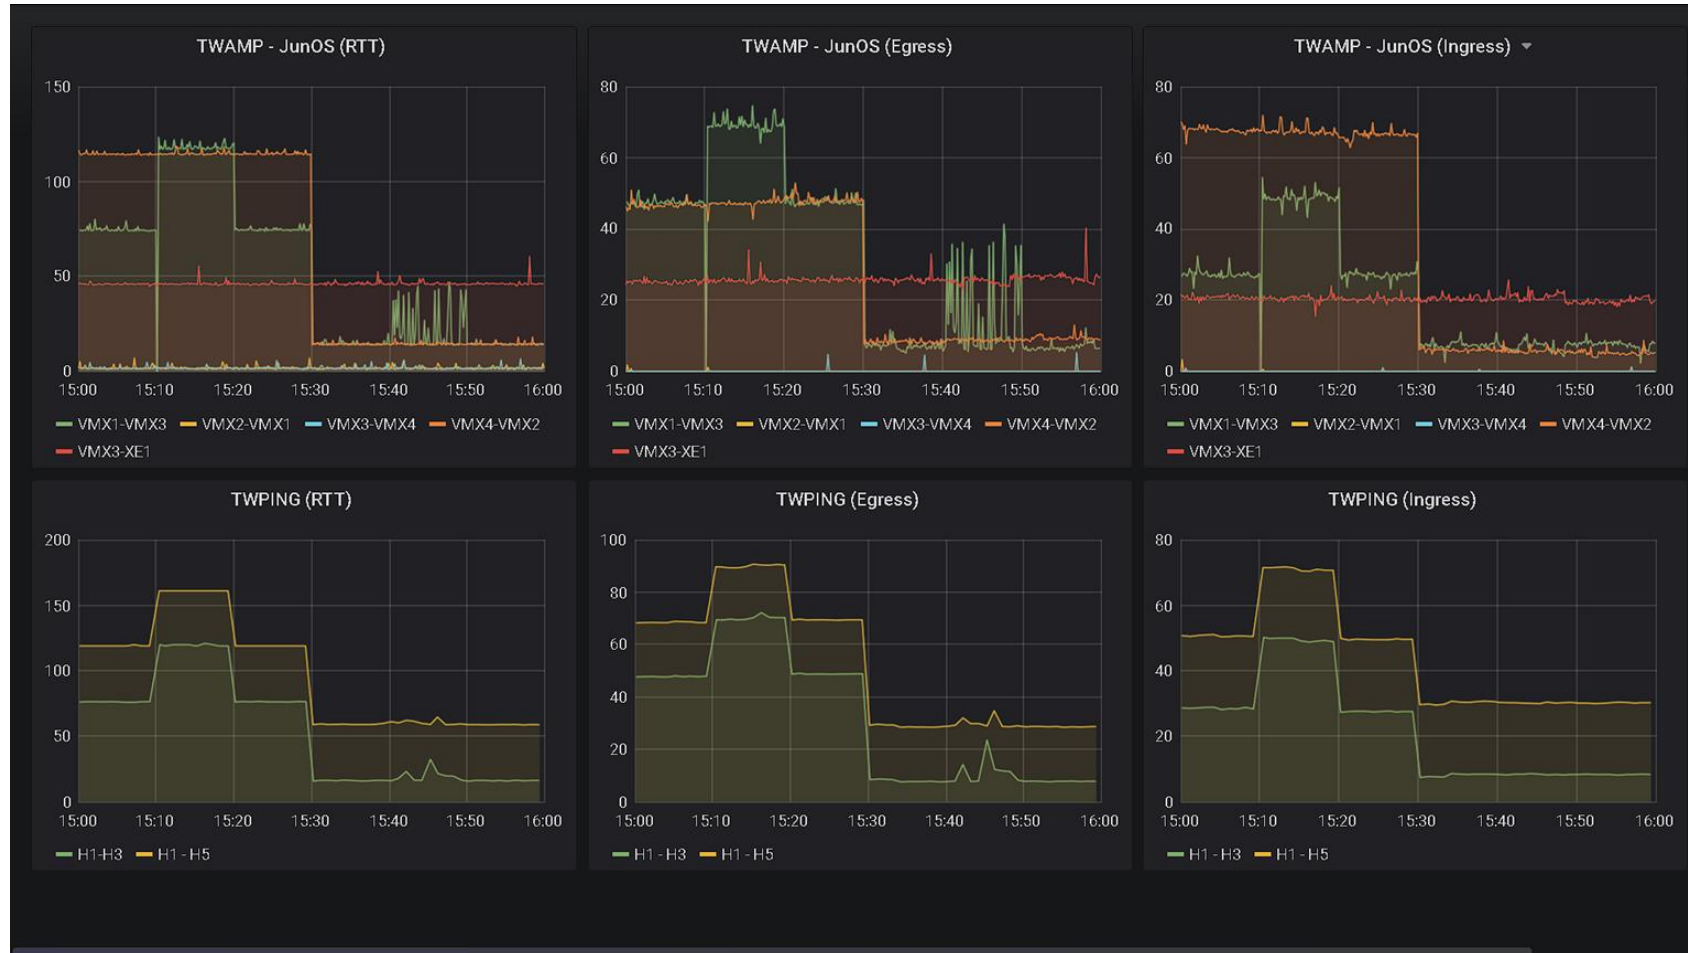

Conclusions

- All the twamp session combinations (H->C, H->J, J->C, C-J, ...) gave very similar results and showed reliability over long periods of time
- The network was not heavily loaded
- Monitoring network services using standard based protocols and no additional hardware is possible.
- Streaming the results from both router platforms without any issues
- Setting up some of the elements (virtual service, finding xpath of the variables for streaming telemetry) not always trivial and not perfectly documented

Soon...

- Zero-footprint Monitoring cookbook (look at the GEANT's announcements)
 - TWAMP interoperability
 - virtual services
 - streaming telemetry
- if interested, send me an email for the final draft.

dd-mm-yyyy

Zero-footprint Monitoring

Milestone <MX.X - Doc Property: Subject>

Grant Agreement No.: 856726
Work Package <Insert EC work package number (WP1)>
Task Item: <Insert task number – e.g. Task 2>

Dissemination Level: <PU (Public), CO (Confidential), CI (Classified)>

Document ID: <Doc Property: Keywords>
Authors: Pavle Vuletić (University of Belgrade), Marinos Dimolianis (NTUA/GRNET), Victor Olifer (IISC)

© GÉANT Association on behalf of the GN4-3 project.
The research leading to these results has received funding from the European Union's Horizon 2020 research and innovation programme under Grant Agreement No. 856726 (GN4-3).



Thank you

Any questions?

www.geant.org

