

cisco_controller

The example configuration shown in this chapter was obtained from a Cisco 4400 Series Wireless LAN Controller.

Initial settings and defining the IP address

In the first phase the controller must be accessed through the Command Line Interface (CLI). When an IP address has been assigned to the controller, further configuration can be done using the web interface, but the CLI can be continued to be used.

Establish access to the controller by using a serial console and configure the initial settings for example as follows.

```
Welcome to the Cisco Wizard Configuration Tool
Use the '-' character to backup
System Name [Cisco_b2:e2:83]: <your_system_name>
Enter Administrative User Name (24 characters max): <your_username>
Enter Administrative Password (24 characters max): <your_password>
Re-enter Administrative Password           : <your_password>

Service Interface IP Address Configuration [none][DHCP]: DHCP

Enable Link Aggregation (LAG) [yes][NO]: NO

Management Interface IP Address: esim. xxx.yyy.zzz.1
Management Interface Netmask: <your_network_mask>
Management Interface Default Router: <your_router's_IP_address>
Management Interface VLAN Identifier (0 = untagged): <0 or 1>
Management Interface Port Num [1 to 2]: 1
Management Interface DHCP Server IP Address: esim. xxx.yyy.zzz.2

AP Transport Mode [layer2][LAYER3]: <layer2 if controller and access points are on same subnet; layer3 if
routing in between>
AP Manager Interface IP Address: esim. xxx.yyy.zzz.3

AP-Manager is on Management subnet, using same values
AP Manager Interface DHCP Server (xxx.yyy.zzz.2):

Virtual Gateway IP Address: xxx.yyy.zzz.www

Mobility/RF Group Name: <choose a suitable name if you have more than one controller. Otherwise, don't care>

Enable Symmetric Mobility Tunneling [yes][NO]: NO

Network Name (SSID): <Define a test SSID at first>
Allow Static IP Addresses [YES][no]: no

Configure a RADIUS Server now? [YES][no]: no #Will be done later
Warning! The default WLAN security policy requires a RADIUS server.
Please see documentation for more details.

Enter Country Code list (enter 'help' for a list of countries) [US]: <your country abbreviation>

Enable 802.11b Network [YES][no]: no
Enable 802.11a Network [YES][no]: YES
Enable Auto-RF [YES][no]: YES


Configure a NTP server now? [YES][no]: no #Will be done later
Configure the system time now? [YES][no]: no #Will be done later

Warning! No AP will come up unless the time is set.
Please see documentation for more details.

Configuration correct? If yes, system will save it and reset. [yes][NO]: yes

#When the system has rebooted, familiarize yourself with the CLI by defining
(Cisco Controller) >config time ntp server 1 xyz.zyx.zzy.wyz
(Cisco Controller) >config time ntp server 2 xyz.zzz.zzy.wyz
```

Access Control Lists

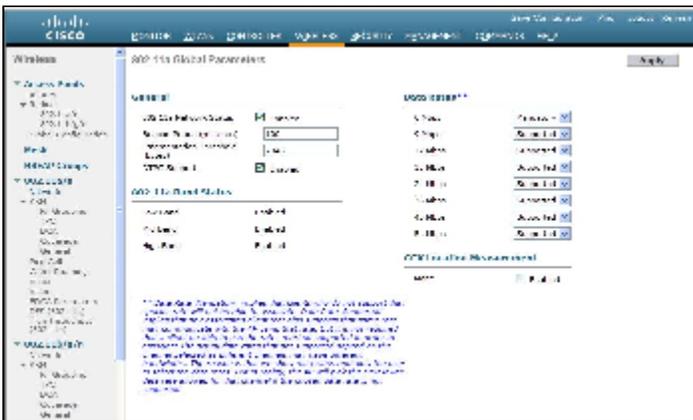

The only standard left to enable is the standard 802.11n. You can choose to enable it for either 2,4 GHz or 5 GHz. It has been suggested that 802.11n is enabled only on the 5 GHz band, in order to utilize the radio resources effectively, see the Campus Best Practice document on "WLAN network planning and setup" Chapter 6.3. That document, along with a wealth of other WLAN resource planning advice, can be found at [GEANT Campus Best Practices - Wireless](#). To enable 802.11n in the network select 802.11a/n | High throughput (802.11n) and/or 802.11b/g/n | High throughput (802.11n) and configure the settings according to the figure below.



At this point you have enabled the radios, but you have not yet defined any network, so don't try to use the access points just yet.

Defining the RADIUS server

Define the RADIUS server to be used in the eduroam network by selecting SECURITY and then AAA | RADIUS | Authentication. Define the IP address, the shared secret and the other parameters according to figure. Please note that your first server will naturally have a server index of one.




Defining a wireless network

Select WLANs and then WLANs | WLANs from the sidebar. Create a new network and name it as shown in the figure below.



After defining the eduroam network, click on the WLAN ID number to start defining the settings for the network. Set the General settings according to the figure below, then click the Security tab.

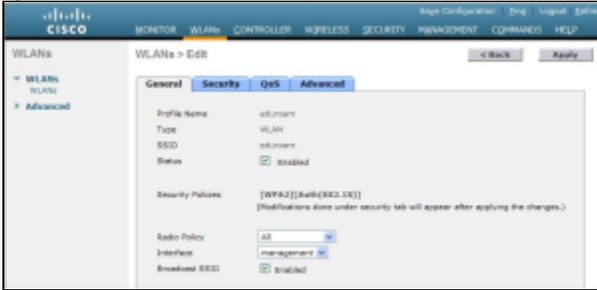

In order to enable only WPA2-AES, fill in the security settings as shown in the figure below.



After this, click on the AAA Servers tab and select the RADIUS server that you defined earlier to be used in eduroam.



Next, click on the QoS tab and make sure that you have set the WMM Policy to either Required or Allowed. Otherwise, the higher transmission rates associated with the 802.11n-standard will not work. Then select the Advanced tab and adjust the settings as shown in the figure below. By choosing the parameter P2P Blocking Action to have the value Forward-UpStream, you can prevent WLAN clients to communicate directly, without involving the AP, as recommended in the Campus Best Practice document on "WLAN Information Security" Chapter 2.2 and 2.3. MFP Client Protection is known to have caused problems and can be disabled.



At this stage, click Apply. In the Advanced-tab, the Client Exclusion timeout value was set to 60s. While this is a suitable value, the rules for client exclusion are a bit too strict. Hence, it pays off to adjust the rules by selecting SECURITY and then Wireless Protection Policies | Client Exclusion Policies from the sidebar and uncheck all other options except for "IP Theft or IP Reuse".

These are the basic settings for the Cisco controller. More advanced settings can be found from the upcoming Campus Best Practice document on "WLAN infrastructure", to be published in the first half of 2011.